Rev. None



Fermi National Accelerator Laboratory Batavia, IL 60510

CMS ME2/1 LOWER CATHODE PANEL COMPONENT SOLDERING TRAVELER

Reference Drawing(s)

Endcap Muon Chamber ME2/1 Final Assembly 5520-ME-368210

Endcap Muon Chamber ME2/1 Cathode Panel Assy Lower Cathode 5520-ME-368214

Buaget Code:		Project Code:		
Released by:		Date:		
Prepared by: M. I	Hubbard, B. Jensen, L. I	ee		
Title		Signature		Date
TD / E&F Process	Engineering	,		
		Bob Jensen/Designee		
TD / E&F CMS A	ssembly			
		Glenn Smith/Designee		
TD / E&F Techno	logical Physicist			
		Oleg Prokofiev/Designee		
TD / CMS Project	t Manager			
		Ciargio Apollipari/Designee		

Revision Page

Rev. None

 Revision
 Step No.
 Revision Description
 TRR No.
 Date

 None
 N/A
 Initial Release
 N/A
 03/24/00

CMS ME2/1 Lower Cathode Panel Component Soldering

Panel Serial No.

Rev. None

Ensure appropriate memos and specific instructions are placed with the traveler before issuing the sub traveler binder to production.

General 1.1 1.2 1.3 1.4 1.5 1.6	White (Lint Free) Gloves (Fermi stock 2250-1800) or Nitrile Gloves (Fermi stock 2250-2040) shall be worn by all personnel when handling all product parts after the parts have been prepared/cleaned. All steps that require a sign-off shall include the Technician/Inspectors first initial and full last name. No erasures or white out will be permitted to any documentation. All incorrectly entered data shall be corrected by placing a single line through the error, initial and date the error before adding the correct data. All Discrepancy Reports issued shall be recorded in the left margin next to the applicable step. All personnel performing steps in this traveler must have documented training for this traveler and associated operating procedures. Personnel shall perform all tasks in accordance with current applicable ES&H guidelines and those
1.2 1.3 1.4 1.5	All steps that require a sign-off shall include the Technician/Inspectors first initial and full last name. No erasures or white out will be permitted to any documentation. All incorrectly entered data shall be corrected by placing a single line through the error, initial and date the error before adding the correct data. All Discrepancy Reports issued shall be recorded in the left margin next to the applicable step. All personnel performing steps in this traveler must have documented training for this traveler and associated operating procedures. Personnel shall perform all tasks in accordance with current applicable ES&H guidelines and those
1.3 1.4 1.5	No erasures or white out will be permitted to any documentation. All incorrectly entered data shall be corrected by placing a single line through the error, initial and date the error before adding the correct data. All Discrepancy Reports issued shall be recorded in the left margin next to the applicable step. All personnel performing steps in this traveler must have documented training for this traveler and associated operating procedures. Personnel shall perform all tasks in accordance with current applicable ES&H guidelines and those
1.4 1.5	be corrected by placing a single line through the error, initial and date the error before adding the correct data. All Discrepancy Reports issued shall be recorded in the left margin next to the applicable step. All personnel performing steps in this traveler must have documented training for this traveler and associated operating procedures. Personnel shall perform all tasks in accordance with current applicable ES&H guidelines and those
1.5	All personnel performing steps in this traveler must have documented training for this traveler and associated operating procedures. Personnel shall perform all tasks in accordance with current applicable ES&H guidelines and those
	associated operating procedures. Personnel shall perform all tasks in accordance with current applicable ES&H guidelines and those
1.6	•
	specified within the step.
1.7	Cover the panel/chamber with Mylar when not being serviced or assembled.
1.8	Never hand pass anything over a panel as dropped items may damage the panel.
Parts Ki	it List
2.1	Attach the completed Parts Kit List for the CMS Cathode Panel Component Soldering to this traveler. Ensure that the serial number on the Parts Kit List matches the serial number of this traveler. Verify that the Parts Kit received is complete. Process Engineering/Designee Date
	2.1

3.0 <u>Panel Preparation</u>

3.2

Completed

3.1 Acquire the appropriate Lower Cathode Panel as per serial number on the bottom of this traveler. Visually inspect the panel to ensure that there are no damages.

Transport the Lower Cathode Panel using the panel transport cart (MD-368810) to the

3.3 Rotate the panel to horizontal with the serial number facing UP and place on the

Cathode Panel Component Soldering Station using approved lifting methods.

Technician(s)

Lead Person

soldering station.

Date


X 3.4 Verify all Section 3.0 steps have been properly completed and signed off and the panel is acceptable for further processing.

Date

4.0 <u>Panel Soldering (Strip Side)</u>


4.1 Using the Grounding Strip Foil Installation templates layout the panel for Grounding Strip installation. Mark foil installation area lightly using a scribe.

Completed

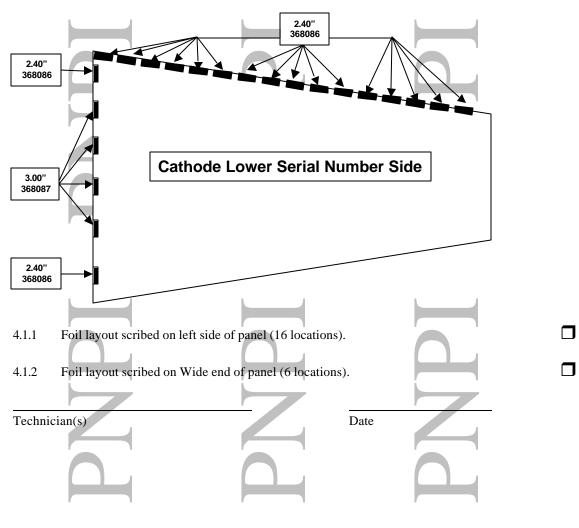


Completed

П

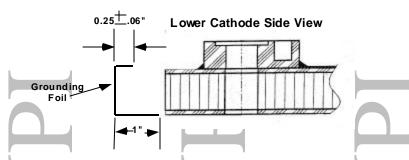

4.2 Form all Grounding Foils to the panel as per Dwg ME-368214 and the above diagram.

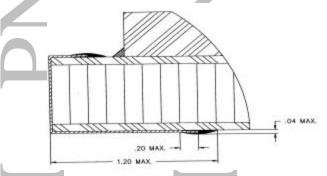


4.3 Place a strip of Almit Solder (MA-368391) under the Strips at the top of the panel. Solder the Strips to the top of the panel Only!! Make sure the solder is smooth when cooled. Continue soldering remaining Grounding Strips tops to the panel until all the Grounding Strips have been soldered to the panel.

Note(s):

When soldering foil to the panel, ensure that no more than 1/8" exceeds past the foil.

Ensure that after soldering of foil, there are no lumps or excess build up of solder on the panel or foil.

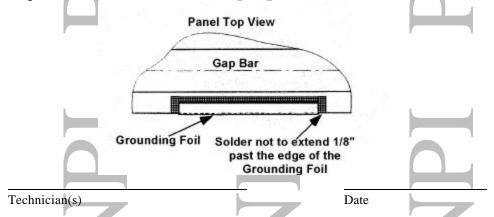

X 4.4 Inspect panel to ensure that all components have been installed and/or soldered correctly in accordance with Lower Cathode Panel DWG 368214 and the panel is acceptable for further processing.

Lead Person Date


CMS ME2/1 Lower Cathode Panel Component Soldering

Panel Serial No.

5.0 <u>Panel Soldering (Non-strip Side)</u>


Completed

5.1 Rotate the Panel so the Non-Serial Number side is facing up, and re-install it onto the Panel Component Soldering Station using approved lifting methods.

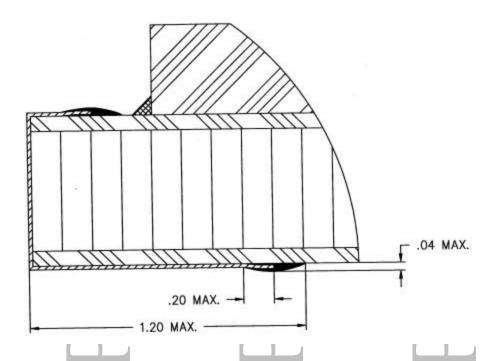

- 5.2 Trim away the part of the Grounding Strips that are covering over the bolt holes.
- 5.3 Solder a ¼" wide strip in the center along the full length of each Grounding Foil.

Panel Side View w/Grounding Foil

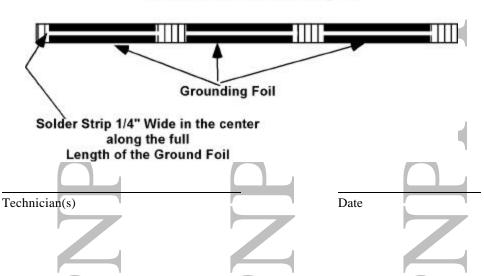

CMS ME2/1 Lower Cathode Panel Component Soldering

Panel Serial No.

 \mathbf{X} 5.4 Inspect panel to ensure that all components have been installed and/or soldered correctly in accordance with Lower Cathode Panel DWG 368214 and the panel is acceptable for further processing.

> Lead Person Date

Transport the completed panel to the Cathode Storage area. 5.5

Technician(s)

Date

6.0 <u>Production Complete</u>

XXX	6.1	Process Engineering verify that the CMS ME2/1 Cathode Panel Component Soldering (5520-TR-333441) is accurate and complete. This shall include a review of all steps to ensure that all operations have been completed and signed off. Ensure that all Discrepancy Reports, Nonconformance Reports, Repair/Rework Forms, Deviation Index and dispositions have been reviewed by the Responsible Authority for conformance before being approved.				
	Comments:					
		Process Engineering/Designee		Date	\ \ \ \ \ \ \ \ \ \ \ \ \ \ \ \ \ \ \	
7.0	Attach	r the Process Engineering "OK to Process Engineering/Designee	oceed" Tag on the panel.	Date		
8.0	Procee	ed to the next major assembly operat	ion as required.	Butc		